



Midwest Lube, Inc.
1035 Pauly Drive
Elk Grove Village, IL 60007


- the leaders in lubrication -

WWW.MIDWESTLUBE.COM

THE AC2 MULTI-LINE, AUTOMATIC LUBRICATION SYSTEM



**FOR FREE
 COST
 ANALYSIS
 AND MORE
 INFORMATION
 CALL
 1-847-690-0063**

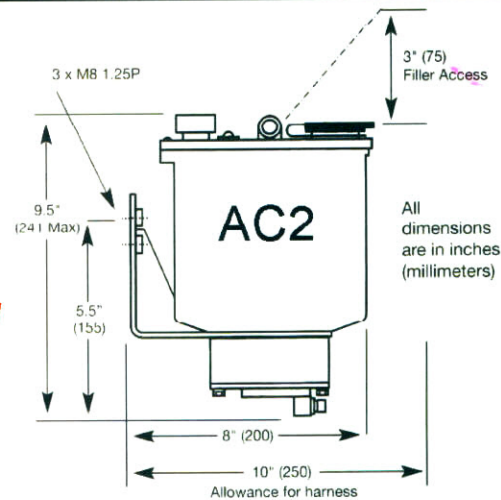

TECHNICAL DATA

The range of AC2 pumps is summarized in the following table, their recommended lubricants, and upper and lower temperature limits when using these lubricants. This information is intended as general guidance only and our Engineering Dept. will be pleased to make specific recommendations on request.

PUMP TYPE	RECOMMENDED LUBRICANTS					
	Oils SAE 80/90	000 Fluid	00 Semi Fluid	0 Soft	1 Stiff	2 Hard
AC2XX1 12 points	-40° F -40° C	-20° F -30° C	-10° F -23° C	0° F -18° C	10° F -12° C	20° F -7° C
AC2XX2 24 points	-20° F -30° C	-10° F -23° C	0° F -18° C	10° F -12° C	20° F -7° C	30° F -1° C
AC2XX3 36 points	0° F -18° C	10° F -12° C	—	—	—	—
Upper Temp. Limit		+110° F +43° C for all pumps				

Ordering Method

AC2XXX		
Cycle Times*	Voltage	Ports
1 2.5 Mins.	1 12V. D.C.	1 12 Points
2 9 Mins.	2 24V. D.C.	2 24 Points
3 12 Mins.		3 36 Points**
4 15 Mins.		

Cycle Time = (Minutes per rev) * Continuous Trailer Option

** Suitable for oil and fluid grade grease NLGI '000' only.

Motor Type Geared Synchronous
 Power Consumption 4 VA
 Nominal Reservoir Capacity 4 lbs.
 Nominal Weight (Full) 10 lbs.


PUMPING UNITS



Each lube point requires a measured volume of lubricant, determined by size and function. To meet this requirement the Interlube AC2 system offers a range of six pumping units with the outputs shown below and are color coded for easy identification.

RED	0.010cc78033-PL
GREEN	0.015cc78034-PL
YELLOW	0.025cc78035-PL
BLUE	0.040cc78036-PL
GRAY	0.060cc78037-PL
BLACK	0.100cc78038-PL
PLUG	34237-402

Installation Diagram

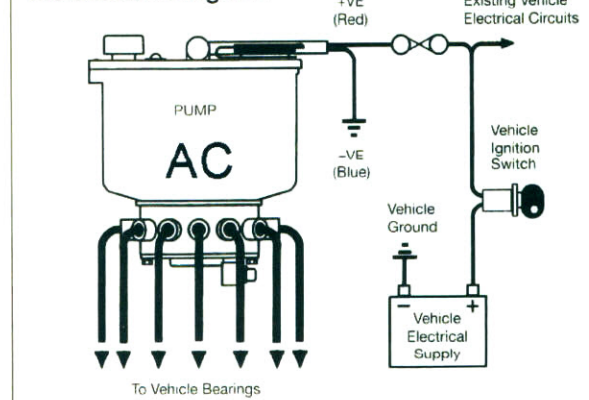

Midwest Lube, Inc. Off: 847/690-0063
1035 Pauly Drive Fax: 847/690-0065
Elk Grove Village, IL 60007
E-MAIL: MDWLUBE@AOL.COM